


specifications:

PHASE	STEP ANGLE	RATED VOLTAGE	CURRENT /PHASE	RESISTANCE /PHASE	INDUCTANCE /PHASE	HOLDING TORQUE	ROTOR INERTIA	WEIGHT
	DEG/STEP	V	A	ohms	mH	N.cm	gcm <sup>2</sup>	Kg
2	1.8	2.5	2.8	0.9	2.5	126	300	0.7


Wiring Diagram:




Rotation:

STEP DIRECTION	A	B	C	D
1	+	+	+	+
2	+	+	+	+
3	+	+	+	+
4	+	+	+	+
1	+	+	+	+



SEE FROM THE SHAFT END

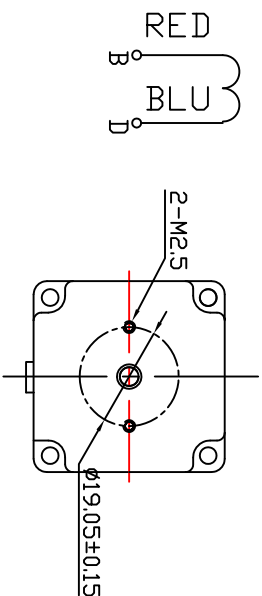

Dimension:

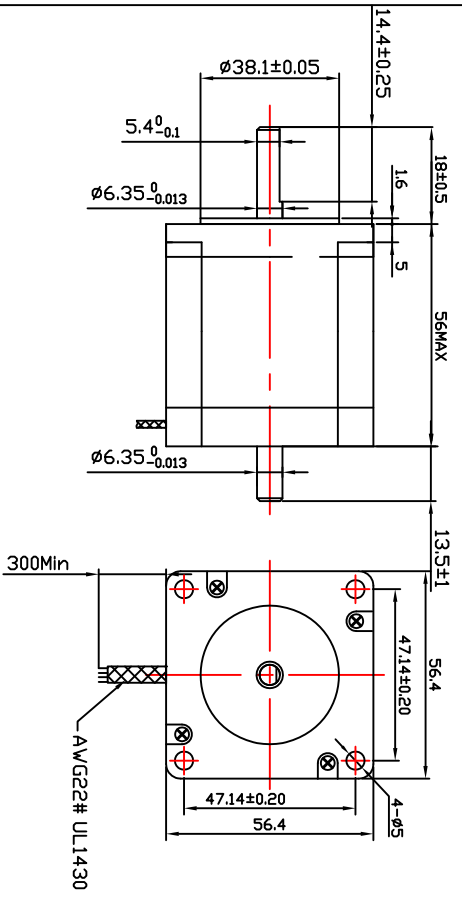

REV/ECN NO.	DESCRIPTION	DESIGN	DATE	P/N
UNLESS OTHERWISE SPECIFIED				
TOLERANCES:				
DECIMALS:				
ANGULAR:				
.X	±0.5			
.XX	±0.25			
.XXX	±0.1			
UNIT: mm				
DO NOT SCALE DRAWING				
MATERIAL	CHECK			
USED ON:	APPD			
DN: FL57STH56-2804BF-E14				
DWG NO. FX3.162	REV			
FX3.162	JS			
THIRD ANGLE PROJECTION	SCALE			
	SHEET			
	DF			
FULLING MOTOR				

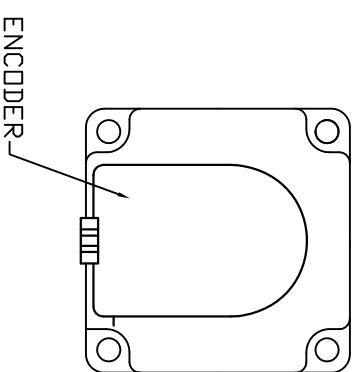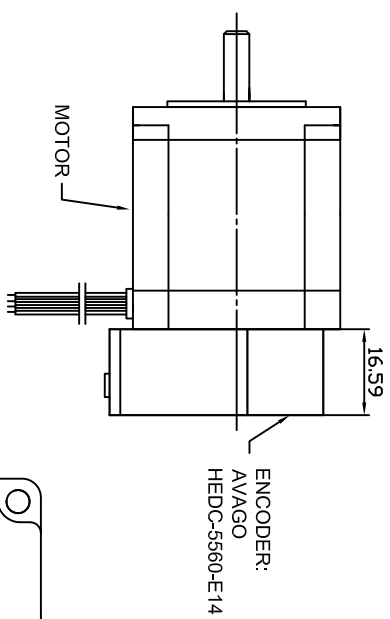

编码器引出线定义

位置	功能定义	颜色
PIN1	GND	黑色
PIN2	INDEX	白色
PIN3	CHANNEL A	蓝色
PIN4	+5VDC	红色
PIN5	CHANNEL B	绿色

REV/ECN NO.	DESCRIPTION	DESIGN	DATE	P/N
UNLESS OTHERWISE SPECIFIED				
TOLERANCES:				
DECIMALS:				
ANGULAR:				
.X	±0.5			
.XX	±0.25			
.XXX	±0.1			
UNIT: mm				
DO NOT SCALE DRAWING				
MATERIAL	CHECK			
USED ON:	APPD			
DN: FL57STH56-2804BF-E14				
DWG NO. FX3.162	REV			
FX3.162	SS			
FIRST ANGLE PROJECTION	SCALE			
	SHEET			
	OF			
Specifications				
FULLING MOTOR				