



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2015.10.10	JSY


Front View

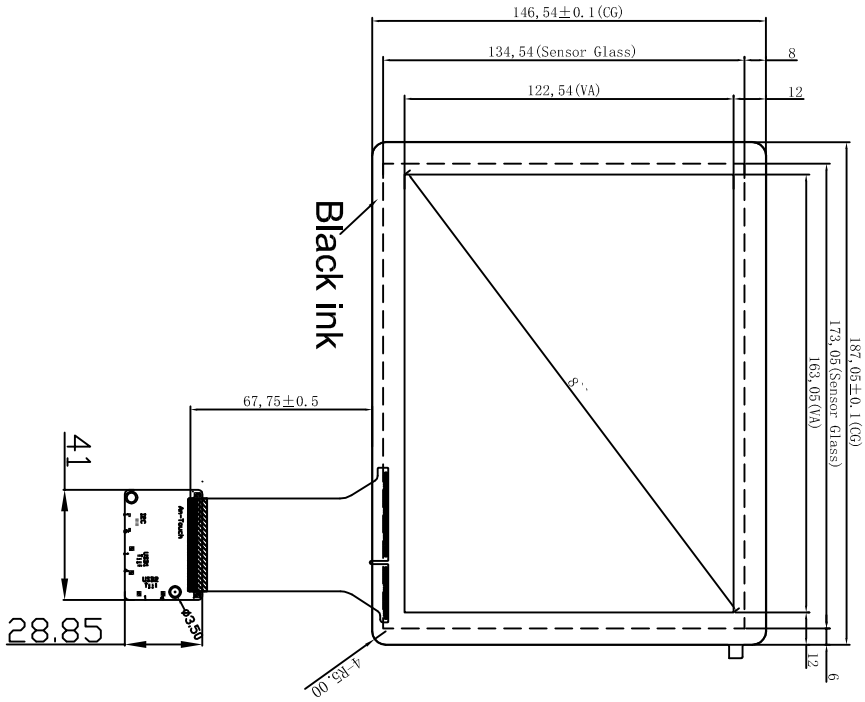

Side View

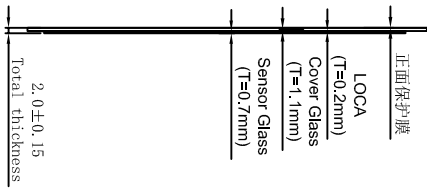

Back View

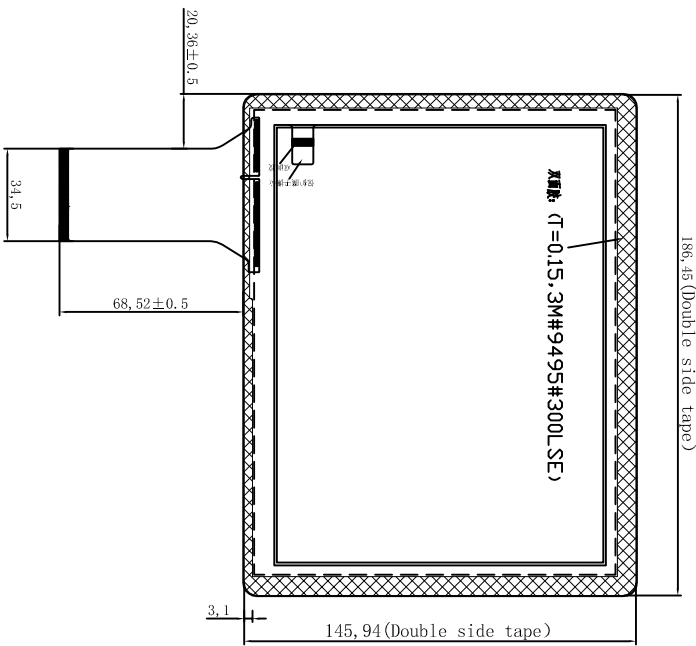

Notes:

1. TP Structure: G+G;
2. TP Type: COB; IC: ILITEK2511
3. Transmittance:  $\geq 85\%$
4. Hardless:  $>6H$
5. Operating conditions:  $-10^\circ\text{C} \sim +60^\circ\text{C}$ ,  $\leq 85\%RH$
6. Storage conditions:  $-10^\circ\text{C} \sim +65^\circ\text{C}$ ,  $\leq 85\%RH$
7. Unspecified tolerance:  $\pm 0,2\text{mm}$
8. All materials in the drawing comply with the Rosh

TP 叠层图

TOP	Protect Film	} 0,7mm
	Cover Glass 1,1mm	
	LOCA 0,2mm	
	ITO	
	Sensor Glass	
BOTTOM	ITO	
	Protect Film	

AC-C1092A-8.0 Drawing

DESIGN	DATE	SHEET	UNIT	SCALE	1st ANGLE PROJECTION
CHECK	DATE	1 of 1	mm	1 : 1	
JSY	2015.10.10				