



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2016.05.23	JSY


Front View

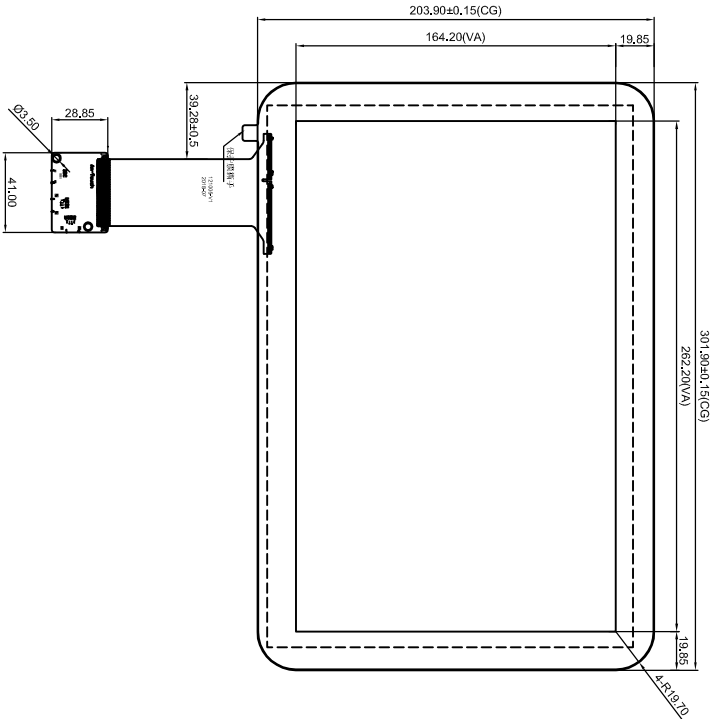

Side View

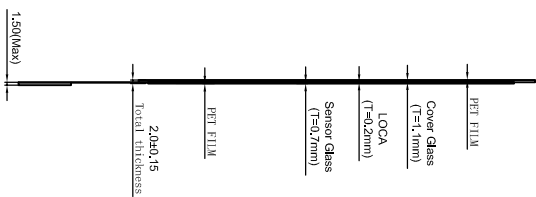

Back View

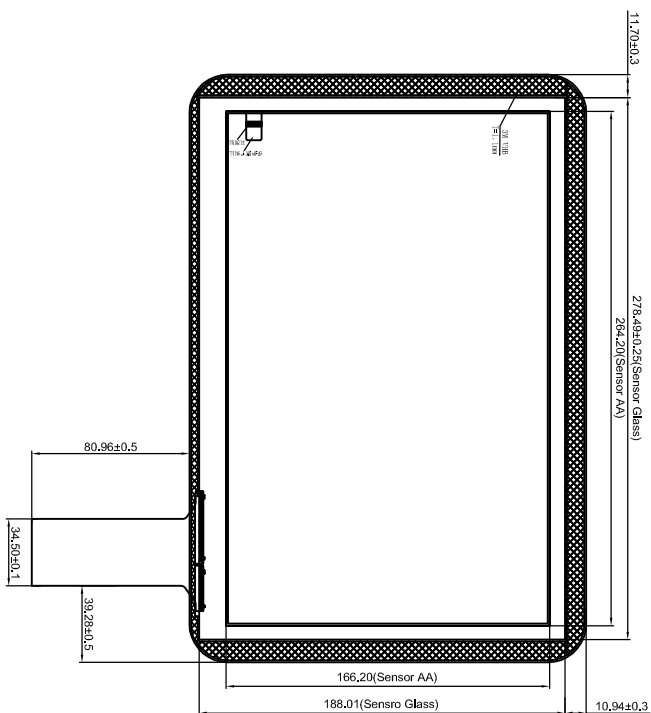

Notes:

1. TP Structure: G+G;
2. TP Type: COB; IC: ILITEK2511
3. Transmittance:  $\geq 85\%$
4. Hardless:  $> 6H$
5. Operating conditions:  $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$ ,  $\leq 85\%RH$
6. Storage conditions:  $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$ ,  $\leq 85\%RH$
7. Unspecified tolerance:  $\pm 0.2\text{mm}$
8. All materials in the drawing comply with the Rosh

TOP	Protect Film
	Cover Glass 1.1mm
	LOCA 0.2mm
ITO	} 0.7mm
BOTTOM	Protect Film

J1 (USB通讯)

PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

AC-K121005 Drawing				SHEET	UNIT	SCALE	1st ANGLE PROJECTION
DESIGN	DATE	DATE	DATE	1 of 1	mm	1 : 1	
CHECK	JSY	DATE	2018.09.13				