



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2016.11.17	JSY

Front View

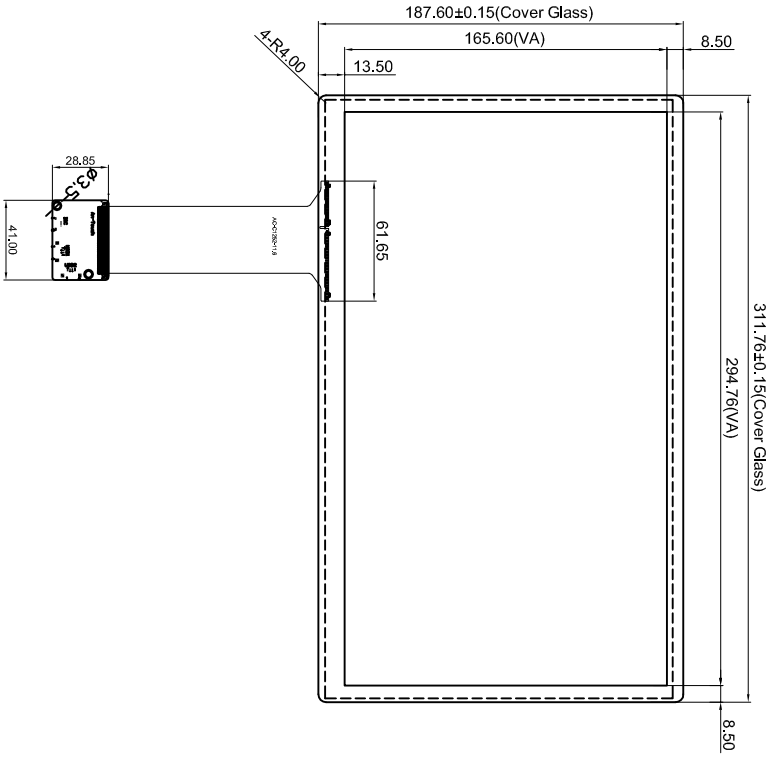

Side View

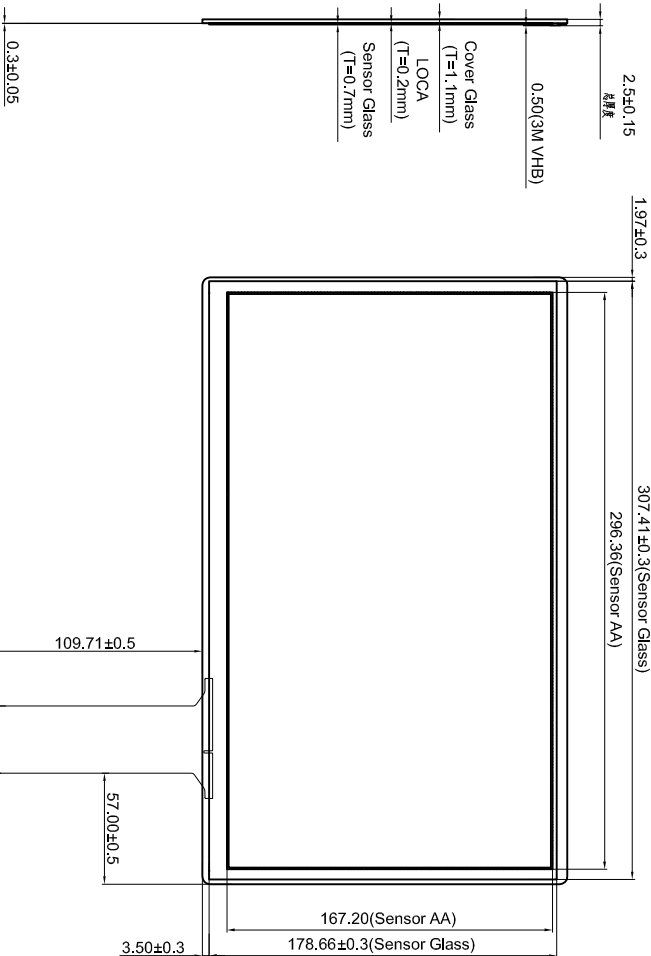

Back View

J1(USB通讯)

PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

TP 叠层图

TOP	Protect Film
	Cover Glass 1.1mm
	LOCA 0.2mm
	ITO
	Sensor Glass
	ITO
	Protect Film
BOTTOM	

} 0.7mm

AC-C133002 Drawing

DESIGN	DATE	SHEET	UNIT	SCALE	1st ANGLE PROJECTION
CHECK	DATE	1 of 1	mm	1 : 1	
JSY	2019.02.19				

- Notes:
1. TP Structure: G+G;
 2. TP Type: COB; IC: ILITEK
 3. Transmittance: ≥85%
 4. Hardness: >6H
 5. Operating conditions: -10°C~+60°C, ≤85%RH
 6. Storage conditions: -10°C~+65°C, ≤85%RH
 7. Unspecified tolerance: ±0.2mm
 8. All materials in the drawing comply with the Rosh