



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2019.11.15	JSY

正视图

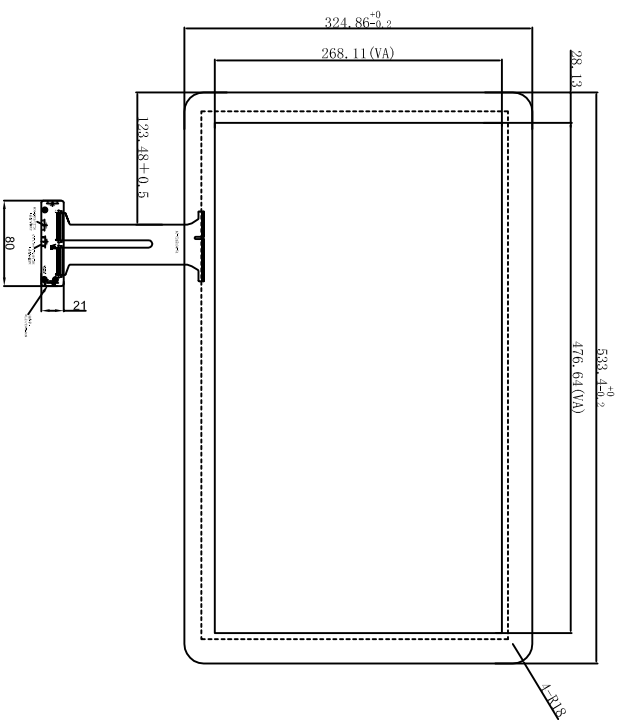

侧视图

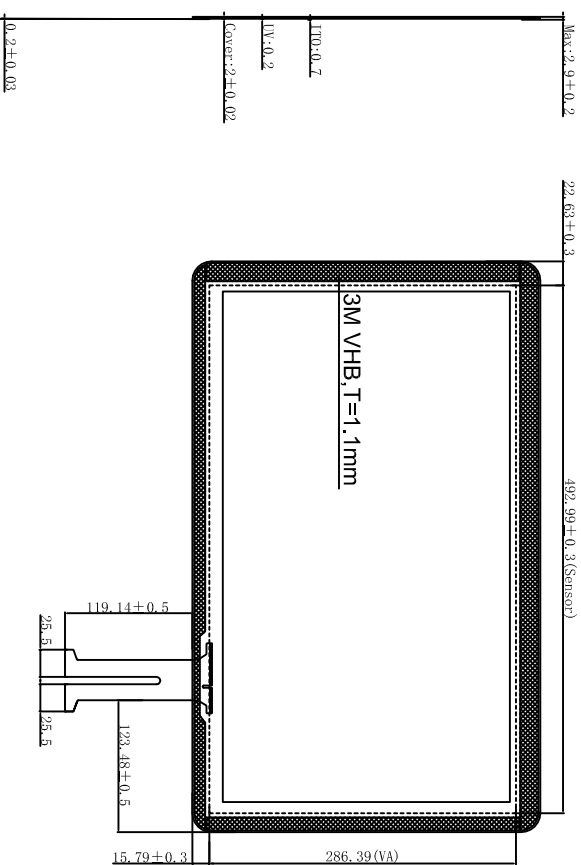

背视图

- 技术参数:
1. TP结构: G+G;
 2. TP类型: COB; IC选用: ILITEK2510
工作电压: 3.3V-5V
 3. 透光率: $\geq 85\%$
 4. 表面硬度: 6H以上
 5. 工作环境: $-10^{\circ}\text{C} \sim +60^{\circ}\text{C}$, $\leq 85\% \text{RH}$
 6. 储存环境: $-10^{\circ}\text{C} \sim +65^{\circ}\text{C}$, $\leq 85\% \text{RH}$
 7. 未注尺寸公差按 $\pm 0.2\text{mm}$
 8. 产品符合RoHS标准.

Touch Module Build Stack

TOP	Cover lens	2.0 mm
	adhesive	0.2mm
	ITO	} 0.7mm
	Sensor glass	
	ITO	
BOTTOM		

AC-W215120 Drawing

DESIGN	DATE	DATE	SHEET	UNIT	SCALE	1st ANGLE PROJECTION
JSY		2019.11.15	1 of 1	mm	1 : 1	

J1 (USB通讯)		J2 (I2C通讯)	
PIN	定义	PIN	定义
1	VDD/5V	1	定义
2	D-	2	SCL 3.3V
3	D+	3	SDA 3.3V
4	D-	4	INT
5	D+	5	GND
6	GND	6	RST