



REV	MARK	HISTORY	DATE	NAME
REV.0	—	—	2018.05.04	ZH


Front View

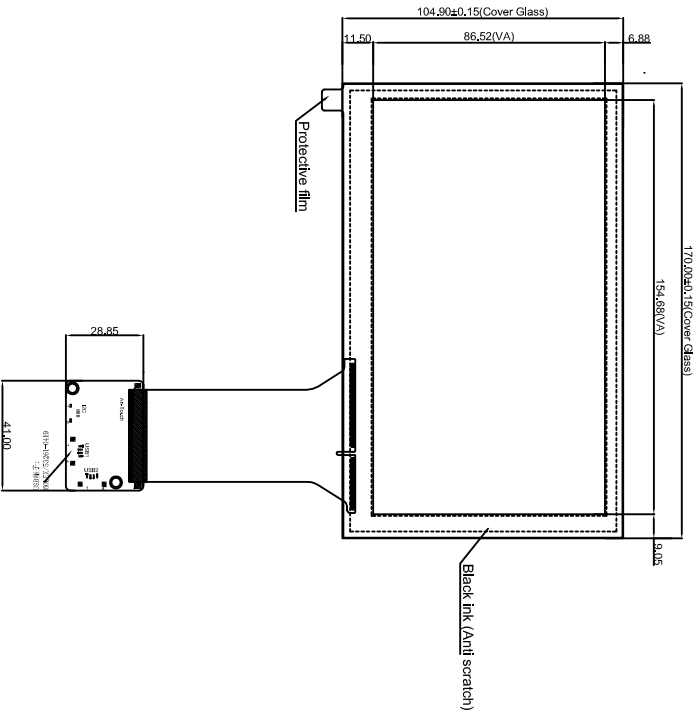

Side View

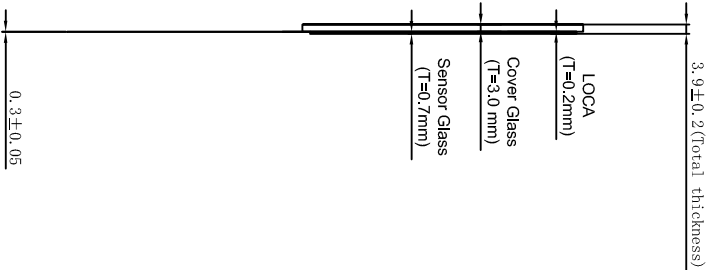

Back View

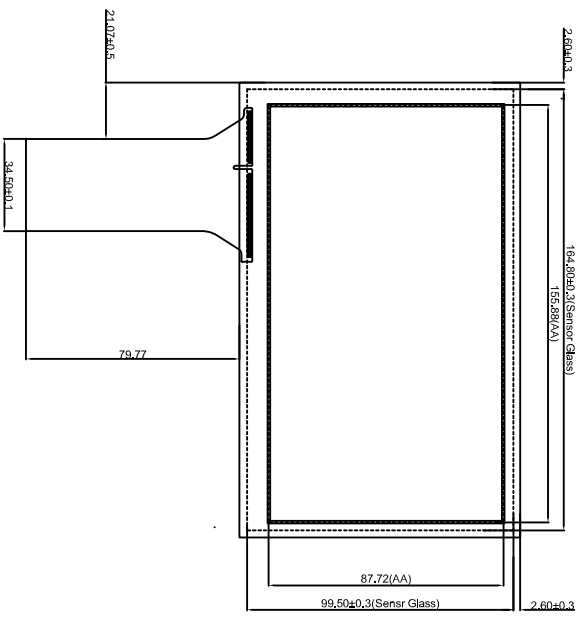

J1 (USB通讯)

PIN	定义
1	VDD/5V
2	D-
3	D+
4	GND

- Notes:
- 1.TP Structure: G+G;
 - 2.TP Type: COB;IC: ILITEK
 - 3.Transmittance: ≥85%
 - 4.Hardless: >6H
 - 5.Operating conditions: -10°C~+60°C, ≤85%RH
 - 6.Storage conditions: -10°C~+65°C, ≤85%RH
 - 7.Unspecified tolerance:±0.2mm
 - 8.All materials in the drawing comply with the Rosh

TOP	Protect Film
	Cover Glass 3.0 mm
	LOCA 0.2mm
	ITO
	Sensor Glass
	Protect Film
BOTTOM	ITO
	Protect Film
} 0.7mm	

AC-C070010 Drawing			
DESIGN	DATE	SHEET	1 of 1
CHECK	DATE	UNIT	m m
	2018.05.04	SCALE	1 : 1
			1st ANGLE PROJECTION