


Touch Foil Product Specifications

- Technical Specifications:

Model (Part Number)	SUN-TFS-65-STA
Screen Ratio	16:9
Foil Size	See below attached
Touch Zone Size	See below attached
Controller Size	See below attached
Tail direction	Short side
Tail length	40mm
Base material	PET foil
Light Transmittance	≥89%
Fixing options	Permanent
Inductive method	Improved projected capacitive technology
Touch accuracy	±2mm
Touch Points	20 points
Thru-glass capability	Maximum 12mm
Calibration method	Automatic
Response time	<10ms
Frame scan frequency	120FPS
Lifetime for foil	9 Years
Temperature Range	-15°C to + 75°C
Working Environment	0% to 95%RH (Unaffected by condensation)
OS compatibility	Windows XP ,Windows 7,Windows 8 Windows10(32 / 64)
	Linux (Kernel version above 3.8)
	Above Android 4.0 (Kernel version above 3.1)
Connection Port	USB 2.0
USB cable length	1200mm
Drive Compatibility	drive-free, plug and play
Working voltage	5V USB
EMC	EN 61000-6-1:2007, EN 61000-6-3:2007+A1:2011
Power Consumption	<0.5W
<p>*This device complies with Part 15 of the FCC Rules Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2)this device must accept any interference received, including interference that may cause undesired operation.</p>	

- Product Design: (65inch, 16:9)
Unit: mm

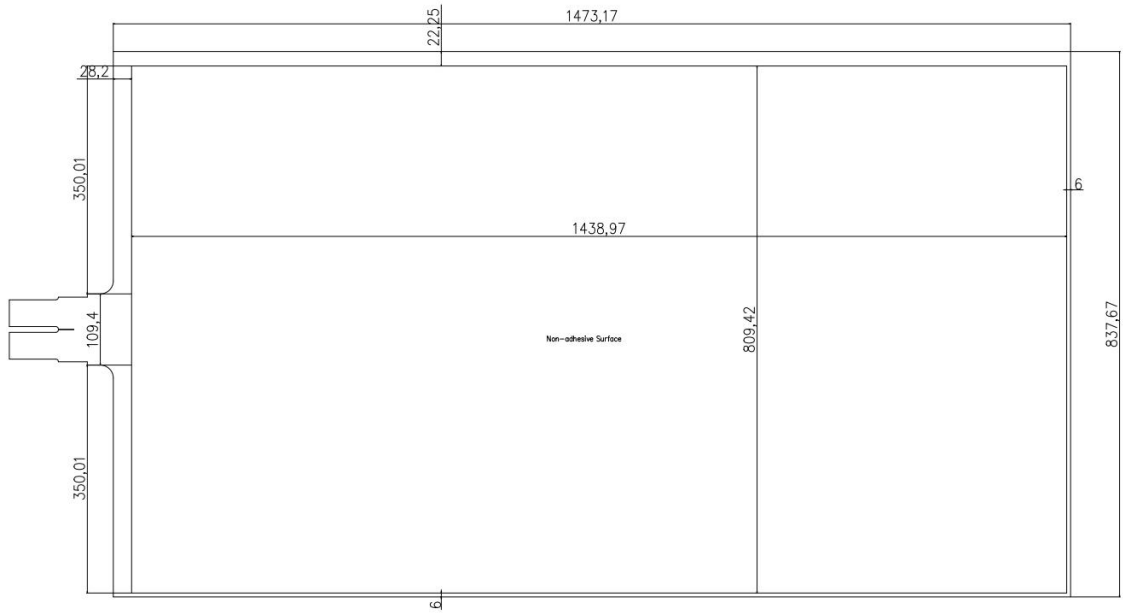

- Controller:
STA

